





22 Spring Valley Rd.
Paramus, NJ 07652
(201) 843-2400
sales@versa-valves.com

Check Valve (1/4" NPT), SST

CV-3-316-44

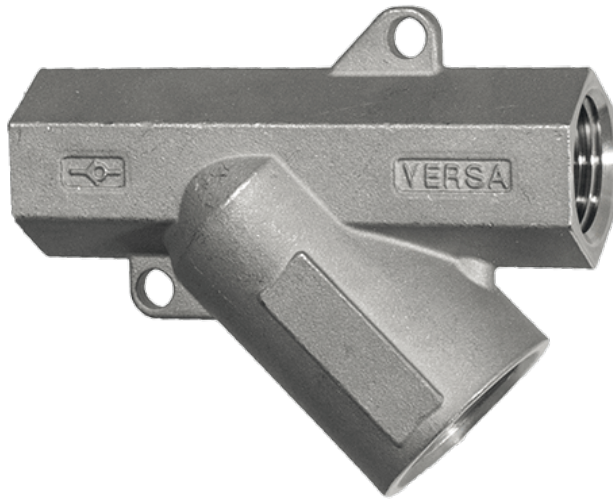

Description

Stainless Steel Check Valve

The VERSA Check Valve is a 316 stainless steel, NACE-compliant device designed to prevent reverse flow in a pneumatic circuit. The Check Valve

allows unrestricted full flow in one direction and blocked "bubble tight" sealing in reverse. Rather than the classic ball design found in many valves, VERSA's unique shuttle design is the key to full flow.

Product Features

- Constructed of SAE 316L marine grade stainless steel conforming to NACE standard MR-01-75 suitable for direct exposure to sour environments
- Low-temperature Buna o-ring seals for low-temperature applications down to -40°F

100% Leak Tested • 10-Year Warranty

Specifications

Actuation	Reverse flow blocked by pilot spring assist
Port Size	Body Ported, 1/4" NPT
Valve Pressure Range (PSI)	0-400 psi
Valve Pressure Range (BAR)	0-27.6 bar
Primary Flow	2.0 Cv
Media	Air - Inert Gas, Hydraulic, Natural Gas
Temperature Range (F)	-54°F to 200°F
Temperature Range (C)	-48°C to 93°C
Body & Internal Parts	316L Stainless Steel
Weight	0.510000

This spec sheet is intended for informational purposes only and while VERSA strives for accuracy, same does not constitute a warranty or guarantee, express or implied, regarding any products or services described herein. VERSA reserves the right to amend its product designs, details, specifications, and other information at any time without prior notice. VERSA also publishes information on its website at [VERSA-Valves.com](https://www.versa-valves.com) and information can be sought by contacting customer service at 201-843-2400 option 3, or emailing to sales@versa-valves.com.